

Features

- Operating voltage: 3.0V~5.5V
- Operating current
 - ♦ 0.5μA (Typ.) @5V, Deep Sleep Mode
 - ♦ 3.2mA(Typ.) @5V, RX Mode, 433.92MHz
- RX sensitivity: @5V, 25°C (433.92MHz)
 - ♦ 10Ksps: -112dBm(Typ.)
- Maximum operating input power: 10dBm@RF-in, BER=0.1%
- Modulation: OOK
- Symbol rate: 1Ksps~20Ksps
- Interface: 5-pin, Span=2.54mm straight hole
- Size: 16.0mm(L)×15.0mm(W)×2.6mm(H)
- Operating temperature: -40°C~85°C

General Description

The BM2302-6x-1 is an ultra-low power consumption, high-performance and low-cost Sub-1GHz Low-IF OOK receiving module whose design is based on the BC2302A/BC2302B devices. The module supports wireless applications in the 315, 433, 868 and 915MHz frequency bands and can be easily accessed using 2-wire I²C interface. The symbol rate is in a range of 1Kbps to 20Ksps. The receiving sensitivity can be up to -112dBm.

Selection Table


Part Number	Frequency Band
BM2302-63-1	315MHz
BM2302-64-1	433MHz
BM2302-68-1	868MHz
BM2302-69-1	915MHz

Pin Definition


Pin No.	Pin Name	Type	Function Description
1	ANT	AI	RF LNA input
2	GND	P	Ground
3	VDD	P	Digital and analog power
4	SD/SCL	DI	SD: RX mode Shut-down control, should be pulled low in RX Mode SCL: I ² C clock input line in Configuration Mode
5	DO/SDA	DI/DO	DO: Demodulated data output in RX Mode SDA: I ² C data line in Configuration Mode

Legend: DI/DO=Digital input/output; AI=Analog input; P=Power.

Module Dimension Drawing

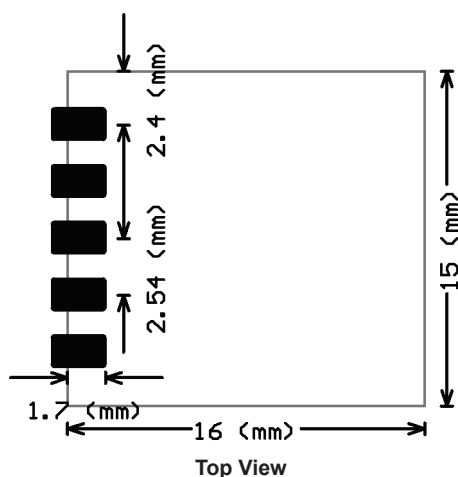

Module Figure

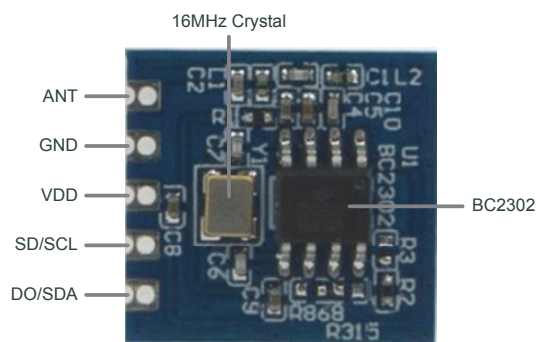

16.0mm(L) × 15.0mm(W)

Two Layer PCB

Bill of Material (433.92MHz)

Item	Comp.	Description	Size	Value	Tol.	Part Number
1	C1	NPO ceramic capacitor	0402	2.7pF	±0.25pF	—
2	C2	NPO ceramic capacitor	0402	9.1pF	±5%	—
3	C4	X5R ceramic capacitor	0402	1μF	±10%	—
4	C5	X7R ceramic capacitor	0402	10nF	±10%	—
5	C6	NPO ceramic capacitor	0402	15pF	±5%	—
6	C7	NPO ceramic capacitor	0402	15pF	±5%	—
7	C8	X7R ceramic capacitor	0402	10nF	±10%	—
8	C9	X5R ceramic capacitor	0402	1μF	±10%	—
9	C10	NPO ceramic capacitor	0402	100pF	±5%	—
10	L1	Inductor	0402	68nH	—	MURATA: LQG15HS68NJ02D
11	L2	Inductor	0402	27nH	—	MURATA: LQG15HS27NJ02D
12	R1	Resistor	0402	10R	—	—
13	R2	Resistor	0402	0R	—	—
14	R3	Resistor	0402	N.C.	—	Auto-RX Mode
15	R4	Resistor	0402	10R	—	—
16	R315	Resistor	0402	N.C.	—	Select RF Band 315MHz (BC2302A/B)
17	R868	Resistor	0402	N.C.	—	Select RF Band 868MHz (BC2302B)
18	U1	IC	8NSOP-EP	BC2302A/B	—	BESTCOMM
19	Y1	Crystal	S3225A	16MHz	—	±20ppm, CL12pF

Copyright© 2019 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek's products are not authorized for use as critical components in life support devices or systems. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com>.